


Version	MARK	MODIFY	DATE
3.0	FPC	FPC	20091224

Thick: 1.4 ± 0.15

hard coating anti newton ring
Front ITO film 0.188mm
Back ITO glass 1.1mm

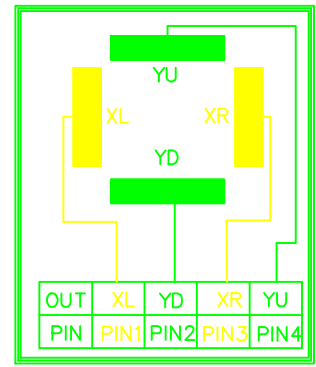

Instruction:
 1.Type: Film to Glass
 2.Operating Voltage: ≤10V
 3.Response Time: ≤10ms
 4.Storage Temperature: -20℃~+70℃
 5.Operation Temperature/Humidity : -10℃~+60℃/ 20%~95%
 6.Hitting Life:>1,000,000 Times ,250gf Force;
 7.writing Life>100,000 Times 250gf Force;
 8.Connect Material:FPC

9.Film Thickness: 0.188mm
 10.Glass Thickness: 1.1mm
 11.Light transmission: ≥78%
 12.Force: 100g or more
 13.Linearity: ≤1.5%
 14.Insulation: ≥20MΩ
 15.Resistance: Y: 170Ω~330Ω
 X: 500Ω~1100Ω
 16.Surface Hardness ≥3H(pencil)

Touch-Pane-VTW4101A2

REVISIONS					
SCALE	1:1	MATERIAL	F/G	Version	4.0
UNIT	mm	TOLERANCE	±0.3mm	NO.	1 of 1
DESIGN	Lucy	DATE	20100108	深圳市纬拓光电技术有限公司 Victor-touch Technology Co., LTD. TEL: 86-755-23998888 FAX: 86-755-23998888 www.victor-touch.com	
CHECK	Peter • LI	DATE	20100108		
RELEASE	Victor	DATE	20100108		